


High Static Pressure Duct Normal




Static pressure selection

By using DC fan motor, it is possible to change static pressure range from 0 to 200Pa (ARXC036) / 300Pa (ARXC072 / 090 / 096).

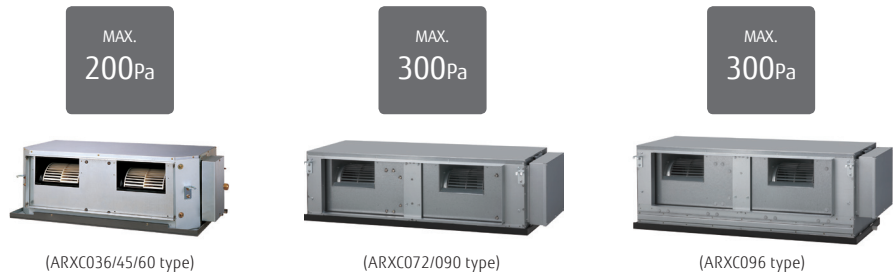


Easy installation (Compact size & Lightweight)

A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.

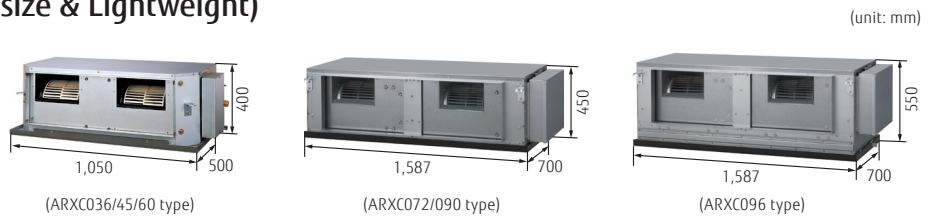


Low noise

Models : ARXC036 / ARXC45 / ARXC60
Cutting off the corners of the conventional indoor unit front panel and fan casing, has enabled less turbulent air flow. Low noise is realized by adopting a plastic case and a plastic fan.



ARXC036GTEH :
Plastic fan [42dB(A)]
* Model : Material
(At 100Pa: Actual noise measurement value)

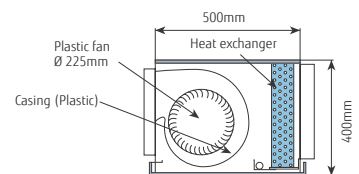

Low energy consumption by high efficiency DC fan motor

Improved motor efficiency from previous model.

